


## Huebsch Home Retail Top Load Washer ZWNE9RSN305NW29

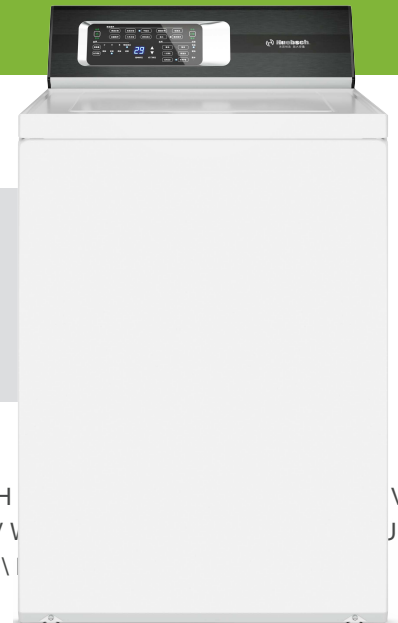

%XLOW OLNH QR RWKHU ZLWK D ZDUUDQW\ WR PDWFK +XH  
FRQVWUXFWHG XVLQJ SUHPLXP PDWHULDOV IRU ORQJ ODVV  
ZDVK UHVXOWV ,I \RX ZDQW \RXU ODXQGU\ GRQH ULJKW \

VKH  
JIRU

### High spin speed

With an industry-best final spin of 820 RPM, Huebsch top load washers remove more water from loads than many competing models. The end results are reduced drying times and lower utility consumption.

### Unmatched durability

Our top load washer is manufactured at our Ripon, WI headquarters. The entire machine receives Huebsch's standard five-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

Full Tub Wash & Rinse fills the entire tub with water to achieve maximum cleanliness.

Huebsch Perfect Wash provides a better clean that's gentle on your clothes.


Solid Mount Suspension System features a full steel base with heavy-duty springs for best-in-class out-of-balance performance, less vibration and longer machine life.

Durable Stainless Steel Tub is gentler on your clothes and ensures long-lasting, dependable performance.

Time Remaining Display eliminates guesswork by clearly showing when your laundry will be finished.

## Huebsch Top Load Washer - Top Load Washer Specifications

Model	ZWNE9RSN115FW01
<b>General details</b>	
Control	HEC
Control location	Rear
Actuation	None
<b>Drum</b>	
Capacity kg	12.5Kg
Volume l	89,8
<b>Drum speed</b>	
G-factor	200
Extraction RPM	820
<b>Power</b>	
Motor power kW	0,75
<b>Cabinet</b>	
Cylinder Finish	Stainless
Color	White
Door type	Solid
<b>Connections</b>	
Electrical requirements	220-240/50/1
Gas inlet connection mm	N/A
Water inlet	3/4"
Water Pressure kPa	1,4-8,3
<b>Transport data</b>	
Net weight kg	84
Shipping weight kg	89
Dimensions HxWxD mm	1092 x 711 x 651
Packed dimensions HxWxD mm	1143 x 762 x 711
Packed volume m3	0,62

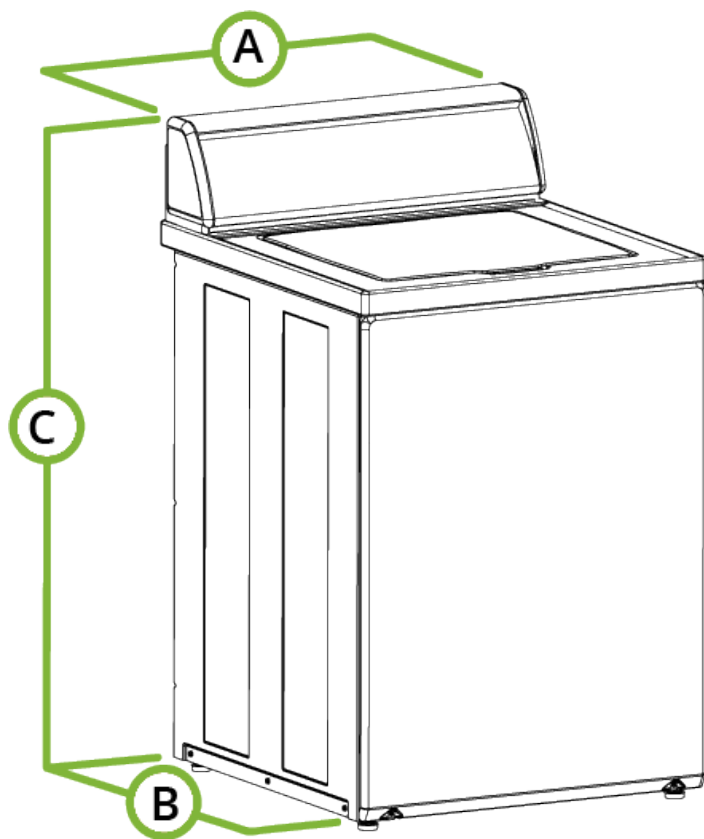

Model	ZWNE9RSN305NW29
A	711
B	651
C	1092

\* Overall depth includes vacuum breaker to door handle.

\*\* High, Very High, and Ultra High Spin Speeds are available on the Galaxy 400 models only.

\*\*\* Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines.

\*\*\*\* Agency approvals may vary depending on configuration. Consult factory for details. Steam connection requires 1/2" N.P.P.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems is registered to ISO 9001.